
ZY-MK

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/zy-mk-p53830

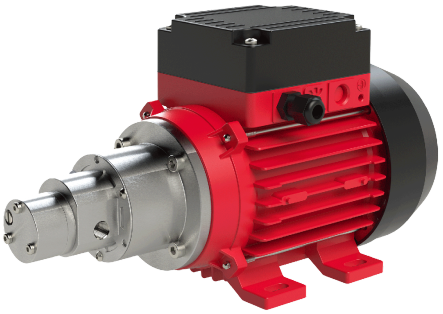

Description

Self-priming, magnetically coupled gear pumps, used in applications with very small volumes and simultaneously required back pressure.

Areas of use

>Refills: Our pumps ensure precise and reliable refilling of even the smallest quantities. >Fuel transfer: Our pumps ensure efficient and safe fuel transfer.

Technical data

Motor & drive

Speed (max.)	2,800 min-1
Motor phases	1~/3~ / DC

Electrics

Power output P_2 (max.)	0.12 kW

Connections & piping

Connection, inlet / suction side	G 1/8"
Connection, discharge side	G 1/8"

Dimensions & logistics

Customs tariff number	84136031

Variants

Article number	Name	Flow rate	Head (min.)
	ZY-1305-MK	1 l/min	91.774 mWS
	ZY-1309-MK	2.75 l/min	50.986 mWS

Article number	Name	Flow rate	Head (min.)
	ZY-1314-MK	3 l/min	30.591 mWS