
ASKG

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/askg-p53939

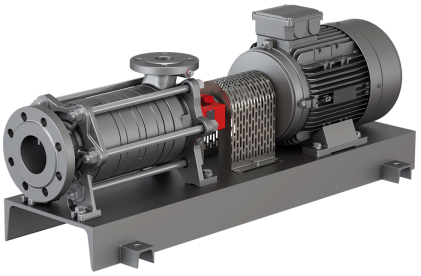

Technical data

Motor & drive

Speed (max.)	1,450 min-1
Degree of protection	IP 55

Electrics

Input voltage	400 V
Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Operating conditions & water

Ambient temperature (min.)	40 ° C

Variants

Article number	Name	Flow rate	Head (min.)	Connection, inlet / suction side	Connection, discharge side
	ASKG2001	–	–	–	–
	ASKG2001 - 2008	3 m³/h	183 mWS	DN 40	DN 20
	ASKG3201	–	–	–	–
	ASKG3201 - 3208	5.3 m³/h	320 mWS	DN 65	DN 32
	ASKG3301	–	–	–	–
	ASKG3301 - 3308	7.5 m³/h	233 mWS	DN 65	DN 32
	ASKG4001	–	–	–	–
	ASKG4001 - 4008	12 m³/h	255 mWS	DN 80	DN 40
	ASKG5001	–	–	–	–
	ASKG5001 - 5008	20 m³/h	300 mWS	DN 100	DN 50
	ASKG6501	–	–	–	–
	ASKG6501 - 6508	35 m³/h	304 mWS	DN 100	DN 65