
ASKM

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/askm-p53942

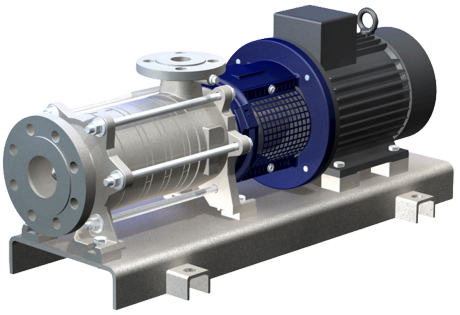

Technical data

Motor & drive

Speed (max.)	1,450 min-1
Degree of protection	IP 55

Electrics

Input voltage	400 V
Frequency	50 Hz

Energy efficiency

Energy efficiency class	IE3

Operating conditions & water

Ambient temperature (min.)	40 ° C

Variants

Article number	Name	Flow rate	Head (min.)	Connection, inlet / suction side	Connection, discharge side
	ASKM2001	–	–	–	–
	ASKM2001 - 2008	3 m³/h	182 mWS	DN 40	DN 20
	ASKM3201	–	–	–	–
	ASKM3201 - 3208	5.3 m³/h	320 mWS	DN 65	DN 32
	ASKM3301	–	–	–	–
	ASKM3301 - 3308	7.5 m³/h	232 mWS	DN 65	DN 32
	ASKM4001	–	–	–	–
	ASKM4001 - 4008	12 m³/h	255 mWS	DN 80	DN 40
	ASKM5001	–	–	–	–
	ASKM5001 - 5008	20 m³/h	302 mWS	DN 100	DN 50
	ASKM6501	–	–	–	–
	ASKM6501 - 6508	35 m³/h	308 mWS	DN 100	DN 65