
BADU M

BADU M2

Article number 2191060838

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/badu-m2-2191060838

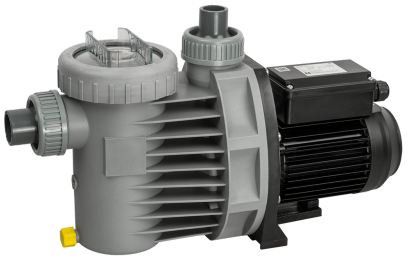

Description

Durable, reliable, and efficient. Self-priming sample water pump for continuous analysis.

Areas of use

Self-priming sample water pump for continuous sampling of sample water in public pools. Pumped medium: swimming pool water.

Version

Close-coupled pump with integrated fiber catcher. Bellows mechanical seal mounted on a plastic impeller hub. The motor or pump shaft does not come into contact with the circulating water. Electrically isolated. Fiber catcher capacity approx. 0.5 l Suction screen mesh size approx. 2.8 x 2.8 mm

Material short text

BADU M2, 1~, 0,25 kW, 3m Kabel+St.

Technical data

Hydraulic power

Head (min.)	11.5 mWS

Motor & drive

Speed (max.)	2,840 min-1
Motor phases	1~
Degree of protection	IP 55
Insulation class	F

Electrics

Power input P_1 (max.)	0.45 kW
Power output P_2 (max.)	0.25 kW

Voltage (max.)	1~ 230 V

Connections & piping

Connection, inlet / suction side	32 mm
Connection, discharge side	25 mm
Recommended suction line diameter	50 mm
Recommended discharge line diameter	50 mm

Dimensions & logistics

Product length	442 mm
Customs tariff number	84137051