
BADU Magna

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/badu-magna-p53619

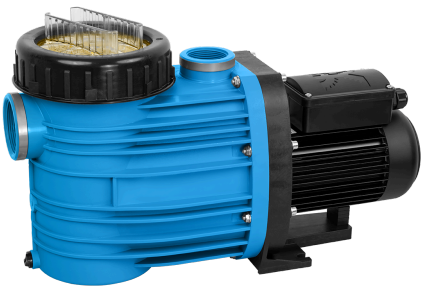

Description

Proven long-distance runner with high flexibility and performance For medium-sized pools and above-ground pools or smaller swimming ponds

Areas of use

Schwimmbadwasser-Umwälzung in Filteranlagen, aufstellbar jeweils max. 3 m oberhalb oder unterhalb des Wasserniveaus.

Version

Blockpumpe mit integriertem Fasernfänger.
Balg-Gleitringdichtung auf Kunststoff-Laufradnabe montiert.
Motor- bzw. Pumpenwelle kommt mit dem im Kreislauf befindlichen Wasser nicht in Berührung.
Elektrische Trennung.
Fasernfängerinhalt: ca. 3 l
Saugsiebmaschenweite: ca. 3,2 x 2,6 mm

Technical data

Motor & drive

Speed (max.)	2,840 min-1
Motor phases	1~
Degree of protection	IP 55
Insulation class	F

Electrics

Voltage (max.)	1~ 230 V
Frequency	50 Hz

Energy efficiency

Energy efficiency class	D

General / Product features

Certification	TÜV

Filtration

Lint catcher capacity	3 l

Connections & piping

Connection, inlet / suction side	2 Rp
Connection, discharge side	1 1/2 Rp
Recommended suction line diameter	50 mm
Recommended discharge line diameter	50 mm

Operating conditions & water

Ambient temperature (min.)	40 ° C
Total salt concentration	5 g/l

Dimensions & logistics

Customs tariff number	84137051

Variants

Article number	Name	Flow rate	Head (min.)	Power input P_1 (max.)	Power output P_2 (max.)	Product range	Strainer basket version
2190128038	BADU Magna 12	12 m³/h	15.5 mWS	0.72 kW	0.45 kW	BADU Premium	1
2190148038	BADU Magna 14	14 m³/h	16.5 mWS	0.97 kW	0.65 kW	–	–
2190088038	BADU Magna 8	8 m³/h	14.5 mWS	0.57 kW	0.3 kW	–	–