
V

Product page https://www.speck-neos.medienreaktor-kunden.de/en/p/v-p53815

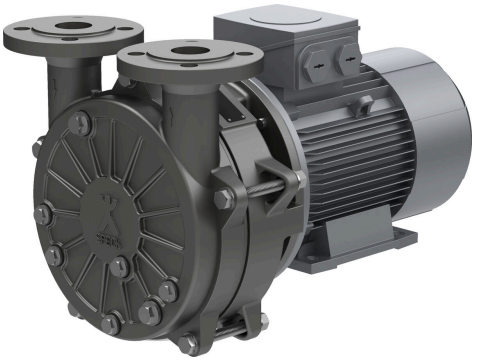

Description

Single-stage liquid ring vacuum pumps with valve flaps. Their advantages include their cost-effective and robust design.

Areas of use

>Boiler feed pumps: These are used for efficient boiler feed pumping. >Condensate pumps: These ensure the effective pumping of condensate.

Technical data

Electrics

Frequency	50 Hz

Operating conditions & water

Ambient temperature (min.)	40 ° C

Dimensions & logistics

Customs tariff number	84141089

Variants

Article number	Name	Flow rate	Suction pressure	Speed (max.)	Degree of protection	Power output P_2 (max.)	Energy efficiency class	Connection, inlet / suction side	Connection, discharge side
	V 130	100 m³/h	33 mbar	1,450 min-1	IP 55	3 kW	IE3	DN 40	DN 40
	V 155	123 m³/h	33 mbar	1,450 min-1	IP 55	4 kW	IE3	DN 40	DN 40
	V 255	199 m³/h	33 mbar	1,450 min-1	IP 55	5.5 kW	IE3	DN 50	DN 50
	V 30	26 m³/h	33 mbar	2,850 min-1	IP 55	1.1 kW	IE3	1"	1"
	V 330	265 m³/h	33 mbar	1,450 min-1	IP 55	7.5 kW	IE3	DN 65	DN 65
	V 430	370 m³/h	33 mbar	1,450 min-1	IP 55	11 kW	IE3	DN 65	DN 65

Article number	Name	Flow rate	Suction pressure	Speed (max.)	Degree of protection	Power output P_2 (max.)	Energy efficiency class	Connection, inlet / suction side	Connection, discharge side
	V 55	48 m³/h	33 mbar	2,850 min-1	IP 55	1.5 kW	IE3	1"	1"
	V 6	9.5 m³/h	40 mbar	2,850 min-1	IP 54	0.4 kW	IE2	G 3/8"	G 3/8"
	V 95	70 m³/h	33 mbar	1,450 min-1	IP 55	2.2 kW	IE3	DN 40	DN 40